


Microcrop

Angle cutting station



Adjustable blade Gap on L blades.
Safety protection.



L cutting up to
3" x 3" x 5/16" without any
waste of neither material
nor burrs.
Material clamping guide.

Flat bar cutting station



Ø 1-3/16" cut and \varnothing up to 1"
in position of flat bar (with
slight deformation).



Cutting of flat bar up to
8" x 1/2". Shearing of an L leg
at 45°.



Material clamping guide.



Adjustable play between
flatbar blades.



Limit switches for travel setting.

Manual selector switch /
automatic shearing
gauge.



Non-returning selector
switch for approaching.

Easily removable doors
to access hydraulic unit.



Universal Shearing and Punching Machines with one cylinder

This range includes four electrically driven models with the following standard equipment: work table, limit switches and measuring scales. Optionally, electric limit switches may be fitted (except on **BENDICROP**, which form part of the standard equipment) for cutting flat bar and section iron. The shearing system consists of one single cut, without wasting any material. The **MINICROP** and **MULTICROP** have been fitted with a patented floating blade for cutting section iron without any deformation of the material.

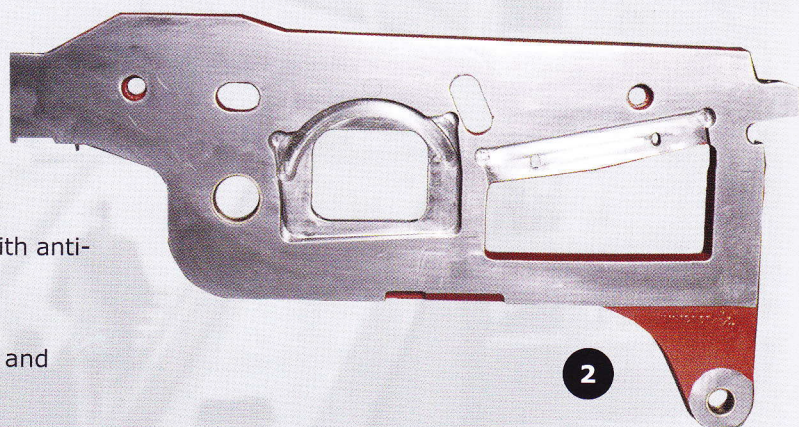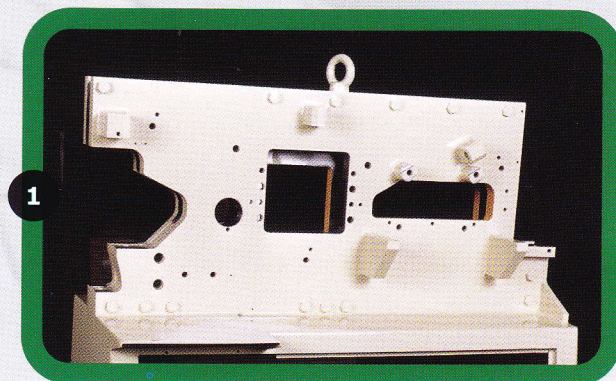

1. Monoblock frame.
2. Monoblock blade holder with anti-friction bushings.
3. Electrical box with safety and integrated controls.
4. Electrically driven hydraulic unit with submerged pump.
5. Double acting cylinder.

